
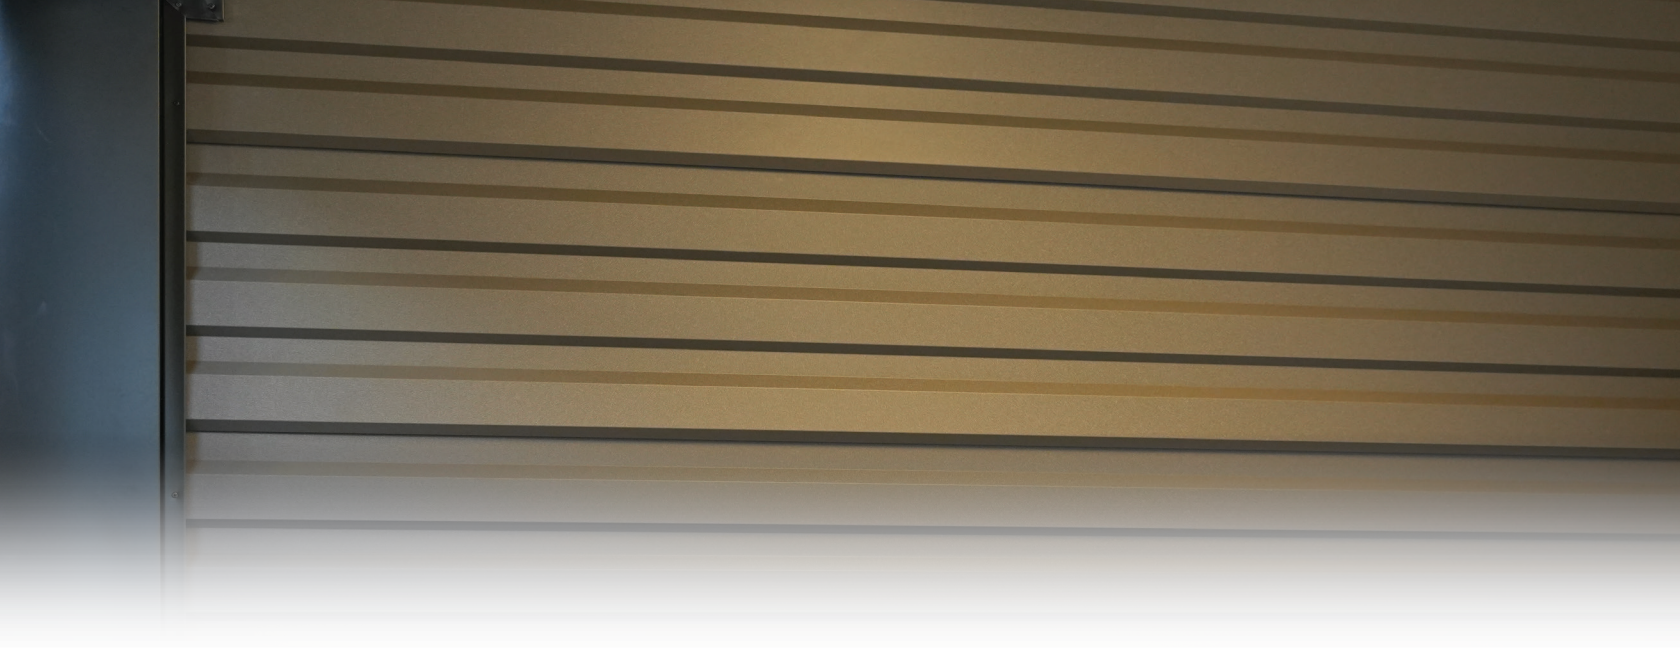


Prime Loc Siding

Crafted For The Professional To Last A Lifetime

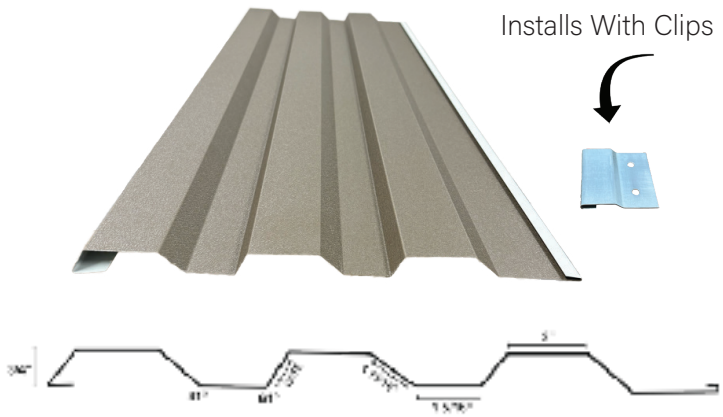

Summary

A sleek, durable siding solution. Perfect for agricultural, industrial, retail, and residential projects. Prime Loc offers long-lasting performance and visual appeal.

Panel Specifications

Thickness

- 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- Full Hard 88,000 PSI Min

Rust Protection

- AZ50 Galvalume Substrate

Paint System

- Sherwin Williams Weather XL
- Kynar 500 in select colors

Sizing

- 13.5" Coverage with .75" Rib Height
- Available in 10' 2" and 12' 2" lengths


LIMITED LIFETIME Paint WARRANTY

UL LISTED


WeatherXL

Trims


Prime Loc Siding

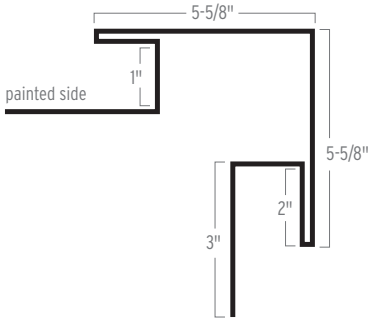


OUTSIDE CORNER

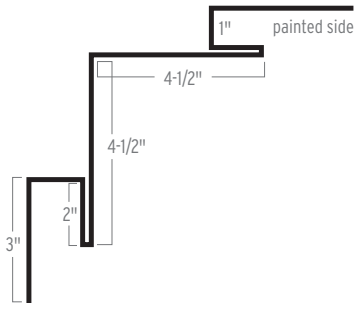


INSIDE CORNER



J-TRIM

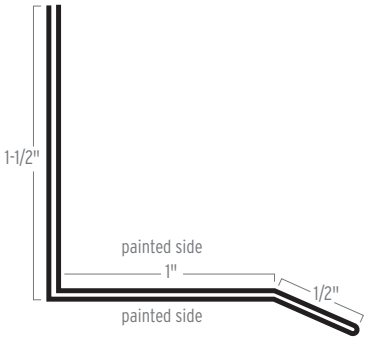


DRIP CAP 1"

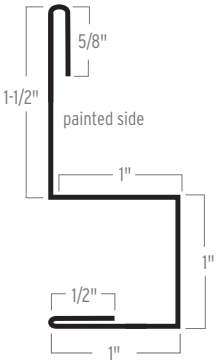

SQUARE BASE TRIM



UTILITY TRIM

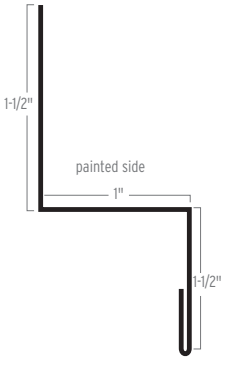

DOUBLE ANGLE

Rochester: 877-889-7802 | Woodburn: 844-435-0598 | Middlebury: 800-575-1713