



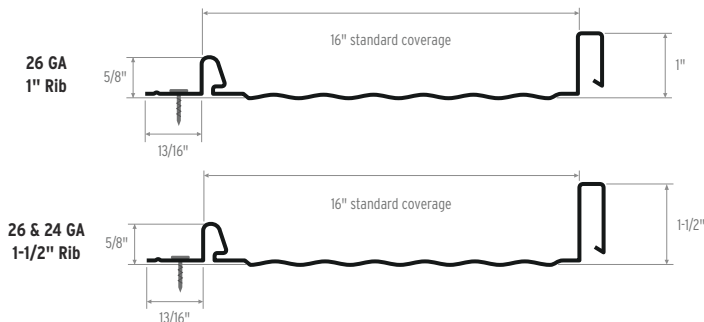

Standing Seam

Crafted For The Professional To Last A Lifetime

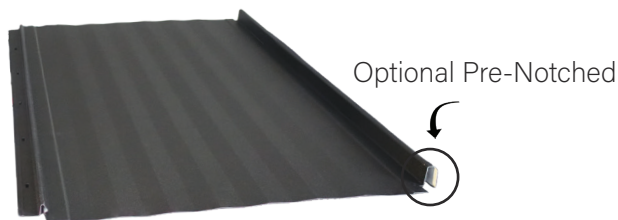

Summary

Standing Seam is designed with a concealed fastener system. Additionally the panel comes with a pre-notched option which saves contractors installation time on the job site.

Panel Specifications

Thickness

- ✓ 26 Gauge Steel — .0185" Before Paint .0202" After Paint
- ✓ 24 Gauge Steel — .0225" Before Paint .0254" After Paint

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ 26 Gauge Sherwin Williams Weather XL
- ✓ 24 Gauge Kynar 500 in select colors


Sizing

- ✓ 26 Gauge Steel with 1" Rib Height
- ✓ 26 Gauge Steel with 1.5" Rib Height
- ✓ 24 Gauge Steel with 1.5" Rib Height
- ✓ Minimum Slope: 3/12




1" Trims


Standing Seam




CONCEALED FASTENER RIDGE




SOLID & VENTED Z TRIM



TRIM FIRST CONCEALED
FASTENER SIDEWALL




CONCEALED FASTENER
ENDWALL




CONCEALED FASTENER RAKE




OFF-SET CLEAT




D-EDGE



TRANSITION TRIM




VALLEY TRIM




FILLER TRIM

1.5" Trims


Standing Seam




CONCEALED FASTENER RIDGE




SOLID & VENTED Z TRIM



TRIM FIRST CONCEALED
FASTENER SIDEWALL




CONCEALED FASTENER
DENVER ENDWALL

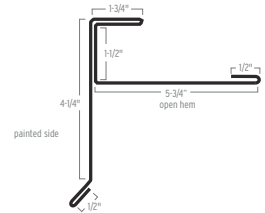


CONCEALED FASTENER RAKE




OFF-SET CLEAT



D-EDGE



TRANSITION TRIM



VALLEY TRIM

Rochester: 877-889-7802 | Woodburn: 844-435-0598 | Middlebury: 800-575-1713

