

PRODUCT CATALOG



Metal Roofing & Siding Panels
Trim Profiles
Post Frame Accessories

Thicker Steel, Delivered Fast!

Publish Date: January 2026

CATALOG INDEX

1	MISSION / VALUES	26	R-PANEL
2	OUR STORY	27	R-PANEL TRIM PROFILES
3	SMOOTH COLOR SELECTION GUIDE	28	R-PANEL COLOR SELECTION GUIDE
4	CRINKLE & PREMIUM COLOR SELECTION GUIDE	29	5-V PANEL
5	RAM PANEL	30	PRO-FIT 12" SOFFIT
6	RAM PANEL TRIM PROFILES	31	PRO-FIT 16" SOFFIT
8	DRIP STOP	32	SOFFIT & FASCIA TRIM
9	RX-4 PANEL	33	SOLID WALL BRACKET
10	RX-4 PANEL TRIM PROFILES	34	FASTENERS
12	STANDING SEAM	35	PIPE BOOTS
13	STANDING SEAM TRIM PROFILES	36	CUPOLAS
15	STANDING SEAM COLOR SELECTION GUIDE	37	STEEL ENTRY DOORS
16	3/4" CORRUGATED	38	SLIDING DOOR SYSTEMS
17	CLASSIC CORRUGATED	39	INSULATIONS/VAPOR BARRIERS
18	MODERN PLANK	40	VENTILATION SYSTEMS
19	MODERN PLANK TRIM PROFILES	41	ACCESSORIES
20	METAL LAP	42	TRIM PLACEMENT CHART
21	METAL LAP TRIM PROFILES	43	48 HOUR JOBSITE DELIVERY
22	BOARD & BATTEN	44	UL CERTIFIED PANELS
23	BOARD & BATTEN TRIM PROFILES	45	ORDER/ESTIMATE
24	PRIME LOC SIDING	46	NOTES
25	PRIME LOC SIDING TRIM PROFILES		

OUR MISSION

It's tough to be profitable in the construction business if you have to wait on materials.

Ramco has developed a unique system that allows our customers to pick up custom length metal roofing and siding the same day or have us unload it on-site in 48 hours. Our customers save money, completing the project more quickly and easily with less damage!

OUR PURPOSE

We believe that the practice of honest business brings glory to God and is a blessing to all. Therefore, the Ramco Team is inspired by, and committed to, customer-focused, profitable business that brings value to all those it touches including owners, team members, customers, vendors and the community.

OUR VALUES

Integrity, Teamwork, Innovation, Quality and Work Ethic



OUR STORY

A Tribute to Our Loyal Customers and Community

In 1998, founder and owner Marvin Ramer, started construction on metal buildings in the Rochester, Indiana area. Marvin soon became dissatisfied with long lead times after having to wait several weeks for metal packages. He quickly began to research the possibilities of buying directly from a national manufacturer.

By 2000, Marvin began retailing metal roofing and siding, buying from several different national companies – thus Ramco was born.

Through the years, Ramco has become the Midwest's premiere metal manufacturer by adding world class manufacturing equipment and facilities, including our Woodburn location in 2013. Additionally, Ramco purchases steel directly from the mill, assuring product availability at the best prices.

In 2023, Ramco again expanded its reach with the addition of a new location in Middlebury. Spring of 2024 the Rochester and Woodburn locations both underwent a substantial expansion, encompassing an additional 70,000 + square feet.


With over two decades of steady growth, Ramco continues to provide our loyal customers with better people and thicker steel in less time.

That said, we are grateful for our journey this far, but in our eyes – we're just getting started.



Color Selection Guide

Standard Lifetime



Brilliant White^Δ



Alamo White



Light Stone^Δ



Ivory



Tan



Buckskin



Taupe



Burnished Slate^Δ



Brown^Δ



Bright Red



Rustic Red



Bugundy



Ash Gray^Δ



Pewter Gray



Slate Gray



Charcoal^Δ



Black^Δ



Hunter Green^Δ



Forest Green



Ocean Blue



Gallery Blue



Galvalume^Δ

Note: This guide is for the following panel profiles: 28-GA Ram Panel, RX-4, 3/4 Corrugated, Classic Corrugated, Modern Plank, Metal-Lap, Board & Batten, Prime-Loc, and 5V.

Note: ^ΔAvailable in 26 GA for the following panel profiles: Ram Panel, RX-4, 3/4 Corrugated, and R-Panel.

Disclaimer: Colors may appear different in various lighting conditions and on different surfaces. Samples are intended as a guide only. For the most accurate color representation, refer to our physical Color Selection Card.

Color Selection Guide

Crinkle Lifetime



Autumn Rustic Red



Terra Burnished Slate



Pebble



Evergreen Hunter Green



Onyx Black



Dark Bronze



Cocoa Brown



Aspen



Granite



Flint Charcoal




Arctic Brilliant White




Dark Slate

Premium Lifetime




Antique Walnut



Weathered Wood



Western Rust




Copper Penny



Rough Cedar



Barnwood



Antique Rust



Driftwood



Woodland Timber



Stormwood Gray



Ledgestone


Note: This guide is for the following panel profiles: 28-GA Ram Panel, RX-4, 3/4 Corrugated, Classic Corrugated, Modern Plank, Metal-Lap, Board & Batten, Prime-Loc, and 5V.

Disclaimer: Colors may appear different in various lighting conditions and on different surfaces. Samples are intended as a guide only. For the most accurate color representation, refer to our physical Color Selection Card.



Ram Panel

Crafted For The Professional To Last A Lifetime

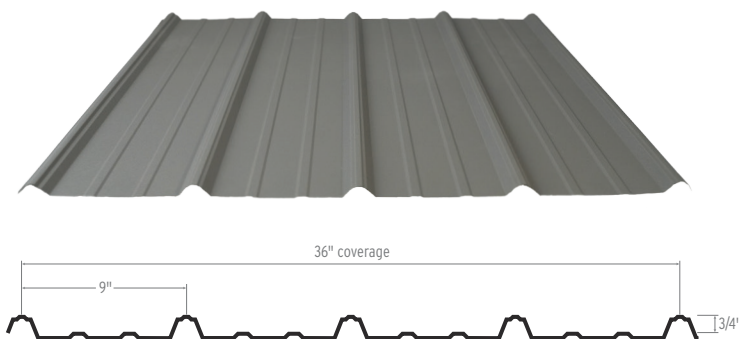

Summary

Ram-Panel is versatile and can be used in varying applications, such as residential, commercial, and architectural projects.

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 36" Coverage with 3/4" Rib Height
- ✓ Minimum Slope: 3/12




WeatherXL


NOTE: Color selection guides for this panel can be found on pages 3 and 4.

Trims


Ram Panel




OUTSIDE RAKE CORNER

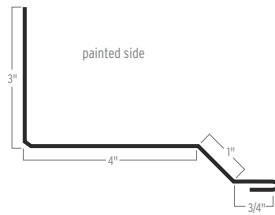


SIDEWALL

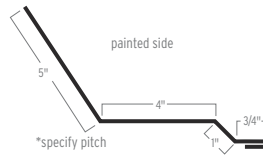


END-WALL

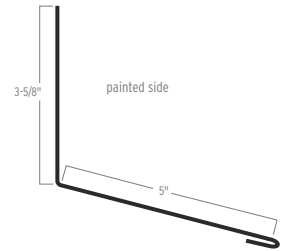

DENVER ENDWALL

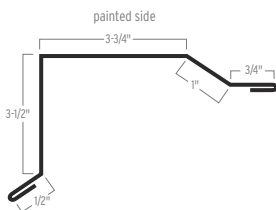


RESIDENTIAL RAKE




RESIDENTIAL EAVE




RIDGE CAP

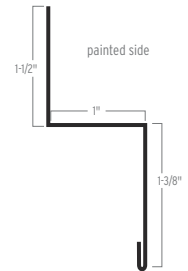


DOUBLE ANGLE

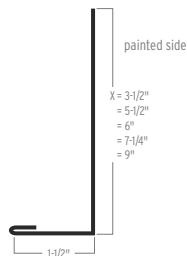


SINGLE ANGLE

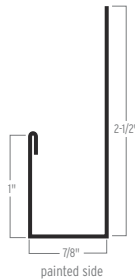


J-TRIM

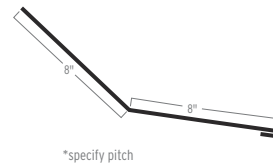


TRANSITION TRIM

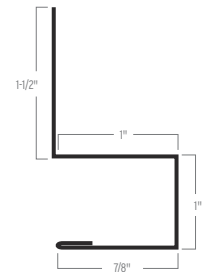


SQUARE BASE TRIM




LOWER GAMBREL

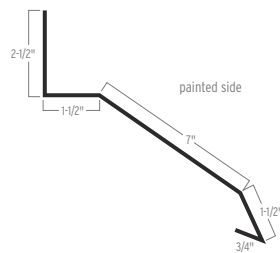


FACE MOUNT TRACK COVER




RAT GUARD




UPPER GAMBREL



MINI CORNER/RAKE

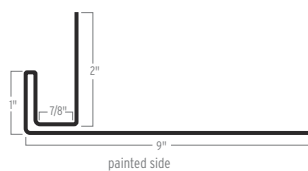

OVERHEAD DOOR JAMB




VALLEY TRIM




RESIDENTIAL HIP CAP

Trims

Ram Panel




DOUBLE BENT DRIP CAP




SINGLE BENT DRIP CAP




WIDE RIDGE CAP




BEADED FASCIA




WIDE VALLEY TRIM

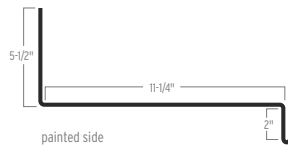


SOFFIT BOX

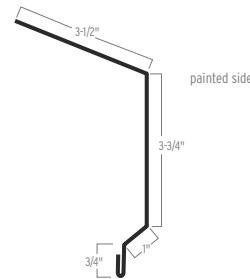


FASCIA EAVE

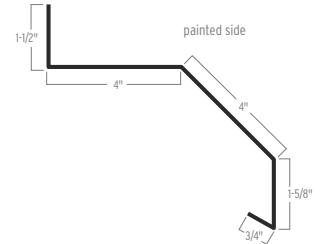


TOP MOUNT TRACK COVER

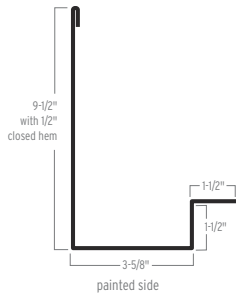


DJ8 WIDE JAMB TRIM

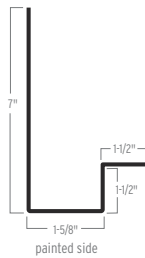


DJ8 JAMB TRIM

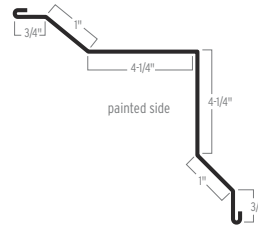


INSIDE CORNER

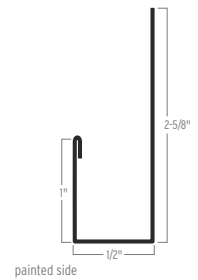


SOFFIT J-TRIM




F TRIM FOR SOFFIT




F TRIM FOR PANEL



F&J FOR SOFFIT

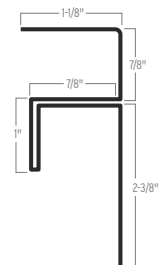

F&J FOR PANEL



SR STANDARD RAIL



FLATSHEET



TECHNICAL DATA

- ✓ UL 723 Approved — Meets flame spread and smoke generation requirements for insurance
- ✓ Antimicrobial Material — Polyester and rubber = NO mold or mildew issues
- ✓ Water Absorption Capacity — Holds up to 10 times its weight in water (> 1 quart per 10 square foot)
- ✓ Extremely Resistant — Not susceptible to ripping, tearing or deterioration
- ✓ Adhesion Warranty — Adhesion improves with age and is backed by a 20-year adhesion warranty
- ✓ Durable — Material has been tried and proven (marketed for 15+ years) in every climate condition across the globe.
- ✓ Animal Confinement — Creates another layer of protection from corrosive elements, making it viable for livestock confinement
- ✓ Noise Reduction — Helps reduce rain and reflective noise up to 20%
- ✓ Easy to Clean — With a hose or pressure washer
- ✓ Available in Ram Panel, RX-4 Panel and R-Panel

THE DRIP STOP SOLUTION

When temperature and humidity conditions reach the dewpoint, moisture condenses on the underside of an uninsulated metal roof. If there is a lot of condensation, drops of water form and start to fall, causing damage to the contents below. The traditional method for dealing with condensation is to try to insulate the roof so that the temperature on the panel never reaches the dew point.

The roof panel with DRIPSTOP anti-condensation felt provides a medium for trapping the moisture in the specially designed pockets formed in the membrane. DRIPSTOP holds the moisture until normal dew point conditions return, and the moisture is released back into the air in the form of normal humidity. DRIPSTOP anti-condensation felt is self adhesive and is applied to the metal panel in the roll forming process. As a result, DRIPSTOP arrives at the building site already in place and installs with the roofing panels.


AREAS OF USE

- ✓ Post Frame / Agricultural Buildings — grain and equipment storage, livestock confinement, outbuildings
- ✓ Steel Buildings
- ✓ Self Storage Units
- ✓ Workshops / Detached Garages
- ✓ Retrofit or Re-roofing Residential Buildings



RX-4 Panel

Crafted For The Professional To Last A Lifetime

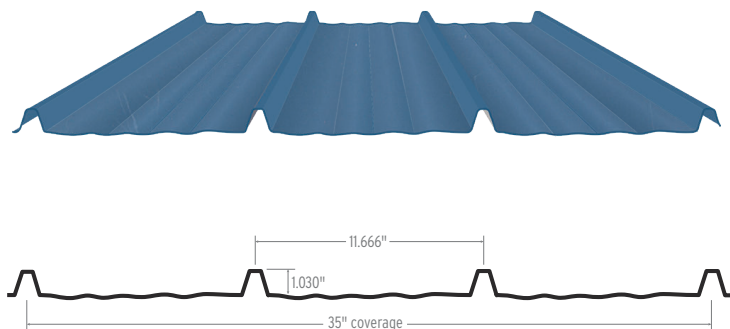

Summary

Ramco's RX-4 panel is suited for roofing & siding applications. The exposed fastener panel offers a high end residential look.

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 35" Coverage with 1.030" Rib Height
- ✓ Minimum Slope: 3/12



WeatherXL

NOTE: Color selection guides for this panel can be found on pages 3 and 4.

Trims


RX-4




VALLEY TRIM




WIDE VALLEY TRIM




RIDGE CAP




OUTSIDE CORNER RAKE



SIDEWALL

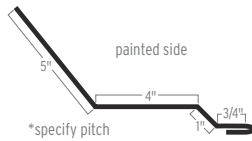


END-WALL




DENVER ENDWALL




FLAT SHEET

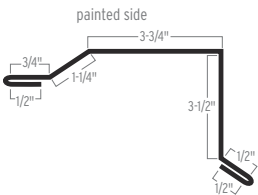


RESIDENTIAL RAKE




DOUBLE ANGLE




RESIDENTIAL EAVE




RAT GUARD

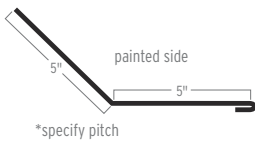


LOWER GAMBREL




UPPER GAMBREL

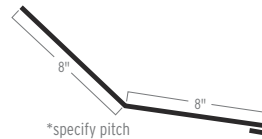


TRANSITION TRIM




SINGLE ANGLE




MINI CORNER/RAKE



OVERHEAD DOOR JAMB




INSIDE CORNER




SINGLE BENT DRIP CAP

Trims


RX-4




DJ8 WIDE JAMB TRIM




DJ8 JAMB TRIM

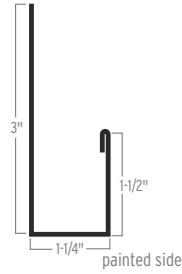


J-TRIM

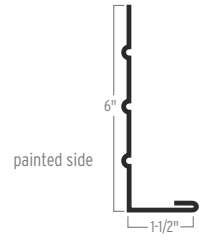


BEADED FASCIA

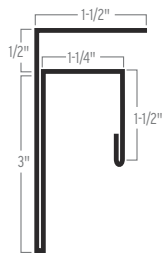

F&J FOR SOFFIT

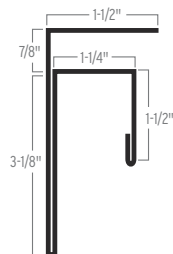

F&J FOR PANEL




SR STANDARD RAIL



Standing Seam

Crafted For The Professional To Last A Lifetime

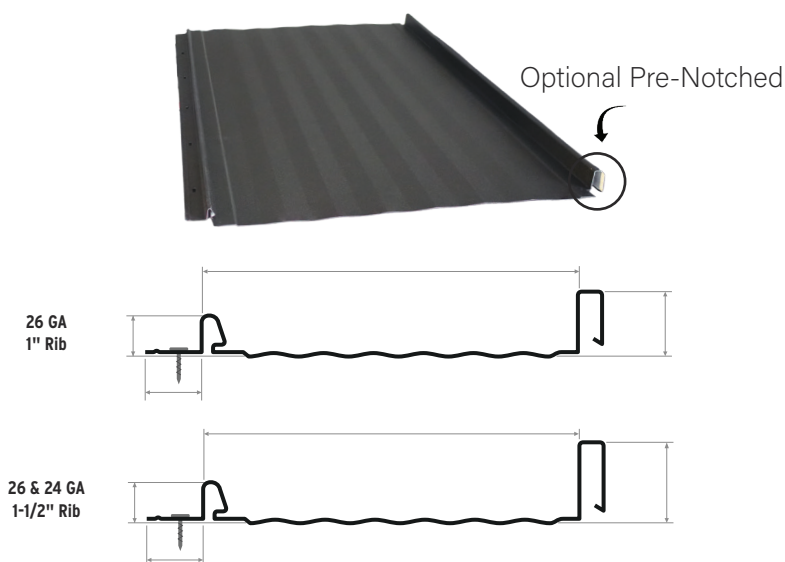

Summary

Standing Seam is designed with a concealed fastener system. Additionally the panel comes with a pre-notched option which saves contractors installation time on the job site.

Panel Specifications

Thickness

- ✓ 26 Gauge Steel — .0185" Before Paint .0202" After Paint
- ✓ 24 Gauge Steel — .0225" Before Paint .0254" After Paint

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ 26 Gauge Sherwin Williams Weather XL
- ✓ 24 Gauge Kynar 500 in select colors

Sizing


- ✓ 26 Gauge Steel with 1" Rib Height
- ✓ 26 Gauge Steel with 1.5" Rib Height
- ✓ 24 Gauge Steel with 1.5" Rib Height
- ✓ Minimum Slope: 3/12

NOTE: Color selection guides for this panel can be found on page 15.




1" Trims


Standing Seam

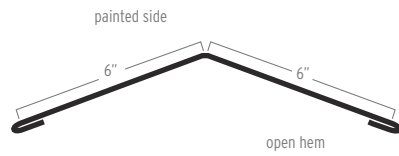


CONCEALED FASTENER RIDGE

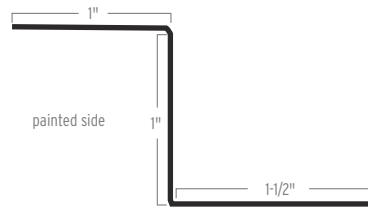


SOLID & VENTED Z TRIM

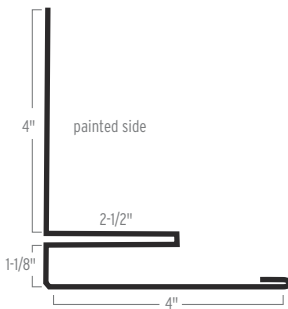


TRIM FIRST CONCEALED
FASTENER SIDEWALL

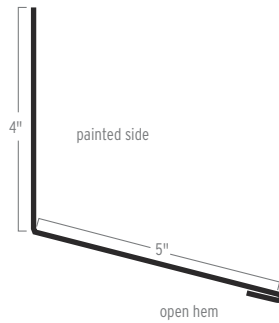


CONCEALED FASTENER
ENDWALL

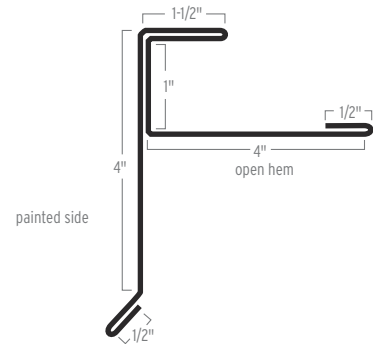


CONCEALED FASTENER RAKE




OFF-SET CLEAT

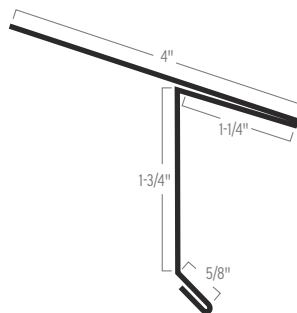


D-EDGE

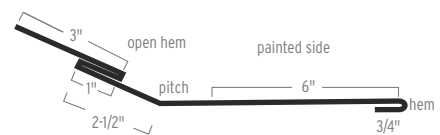

TRANSITION TRIM

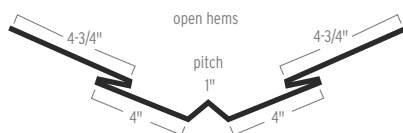


VALLEY TRIM




FILLER TRIM

1.5" Trims


Standing Seam

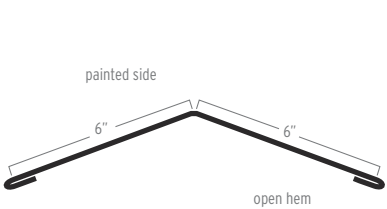


CONCEALED FASTENER RIDGE

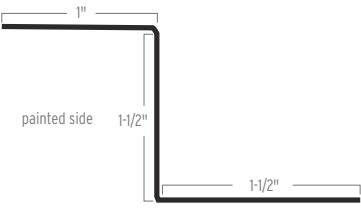


SOLID & VENTED Z TRIM

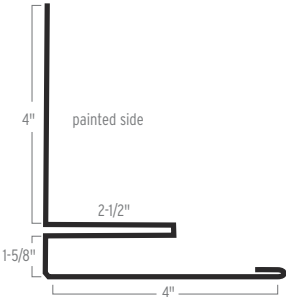


TRIM FIRST CONCEALED FASTENER SIDEWALL

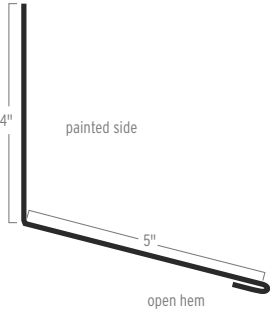


CONCEALED FASTENER DENVER ENDWALL

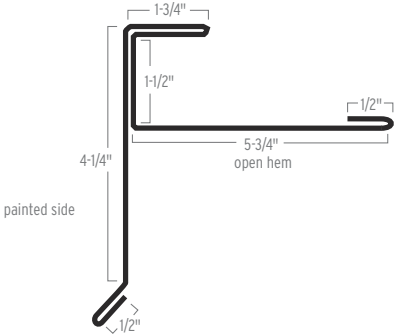

CONCEALED FASTENER RAKE

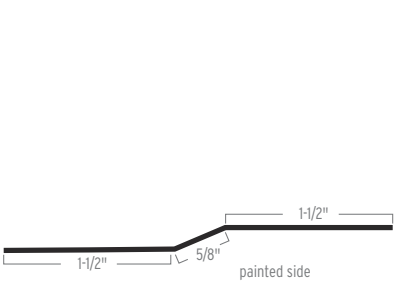


OFF-SET CLEAT

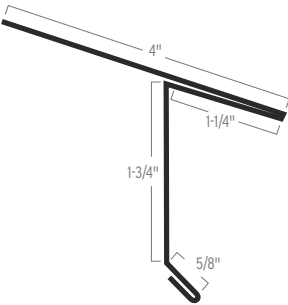

D-EDGE




TRANSITION TRIM

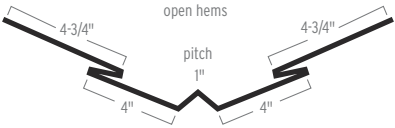

VALLEY TRIM

Color Selection Guide

26-GA Smooth Colors



Brilliant White



Brown



Hunter Green



Rustic Red



Ocean Blue



Burnished Slate



Burgundy



Black



Charcoal



Copper Penny



Galvalume®




Western Rust


26-GA Crinkle Colors



Flint Charcoal



Terra Burnished Slate




Cocoa Brown




Autumn Rustic Red




Evergreen Hunter Green



Onyx Black



Dark Slate



Dark Bronze

24-GA Kynar Colors



Classic Green



Matte Black



Burnished Slate



Mansard Brown



Regal Blue



Terra Cotta



Colonial Red



Charcoal




Slate Gray

Disclaimer: Colors may appear different in various lighting conditions and on different surfaces. Samples are intended as a guide only. For the most accurate color representation, refer to our physical Color Selection Card.



3/4" Corrugated

Crafted For The Professional To Last A Lifetime

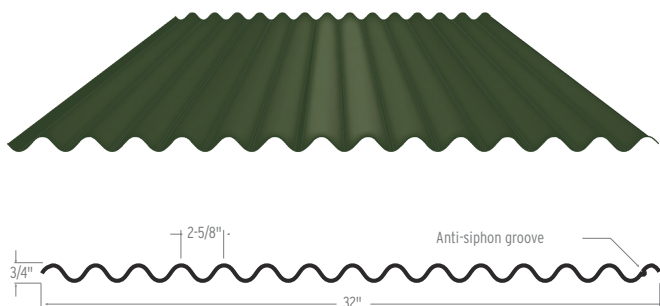

Summary

The 3/4" Corrugated is a popular panel with a modern and contemporary design. The panel is versatile for interior and exterior uses with crinkle and standard color options to choose from.



WeatherXL

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing



- ✓ 32" Coverage with 3/4" Rib Height
- ✓ Minimum Slope: 3/12

NOTE: Color selection guides for this panel can be found on pages 3 and 4.



Classic Corrugated

Crafted For The Professional To Last A Lifetime

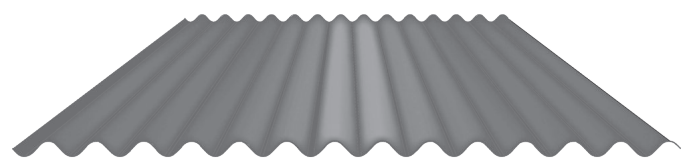

Summary

The Classic Corrugated (1-1/4 corrugated) is an accent panel that is suited for interior and exterior projects. This panel is great for eye-catching wainscot, dormer accents, bars, kitchen islands and other creative projects.



Panel Specifications

Thickness

- ✓ 28 Gauge Steel (Select Colors Produced in 29 Gauge)

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Acrylic Coated Galvalume


Sizing

- ✓ 24" Coverage with 1/4" Rib Height


NOTE: Color selection guides for this panel can be found on pages 3 and 4.

Modern Plank

Crafted For The Professional To Last A Lifetime

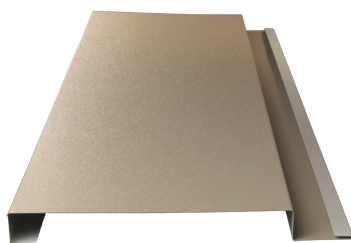

Installs With Clips

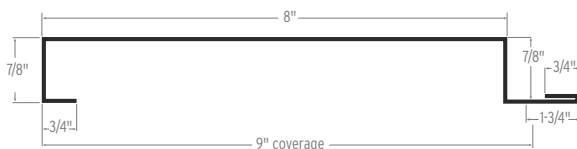

Summary

The modern plank is an accent panel which provides a distinct look to add a modern touch to your project.



WeatherXL

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL


Sizing

- ✓ 9" Coverage with 7/8" Rib Height


NOTE: Color selection guides for this panel can be found on pages 3 and 4.

Trims


Modern Plank

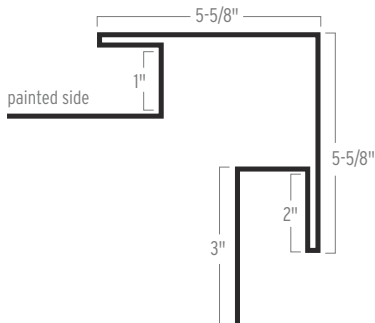


OUTSIDE CORNER

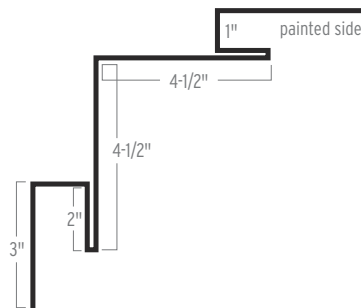


INSIDE CORNER

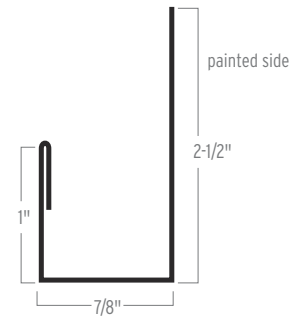


J-TRIM

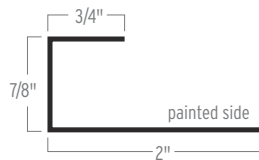


MODERN PLANK SEAM
TRIM PART 1

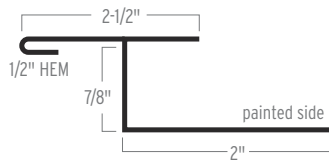

MODERN PLANK SEAM
TRIM PART 2

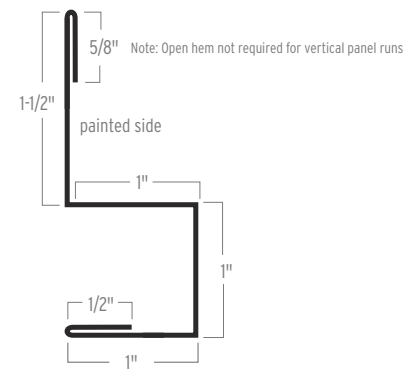


SQUARE BASE TRIM

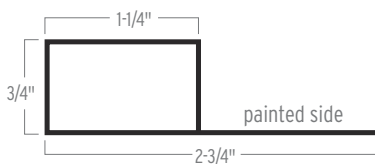

MODERN PLANK
UPPER FINISH

Metal-lap

Crafted For The Professional To Last A Lifetime

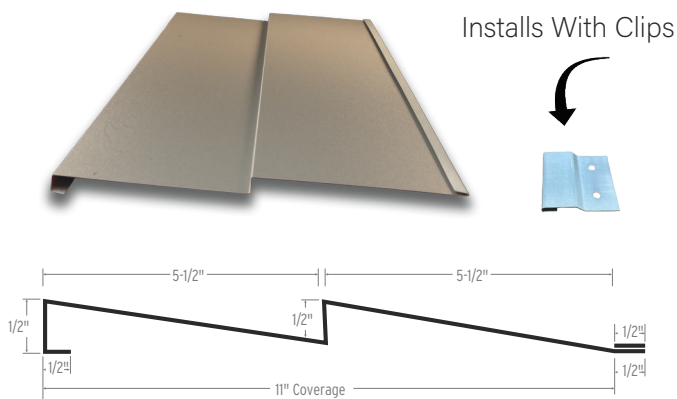

Summary

Metal-lap provides a great alternative to traditional wood siding options and can be used in commercial and residential settings.



WeatherXL

Panel Specifications

Thickness

✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint

Rust Protection

✓ AZ50 Galvalume Substrate

Paint System

✓ Sherwin Williams Weather XL


Sizing

✓ 11" Coverage with 1/2" Rib Height


NOTE: Color selection guides for this panel can be found on pages 3 and 4.

Trims


Metal-lap

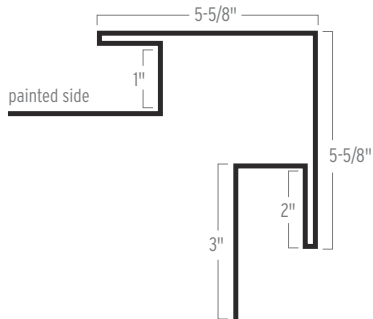


OUTSIDE CORNER

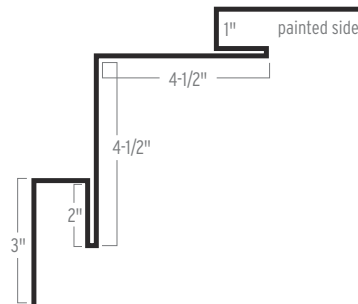


INSIDE CORNER

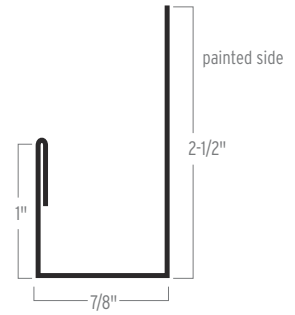

J-TRIM

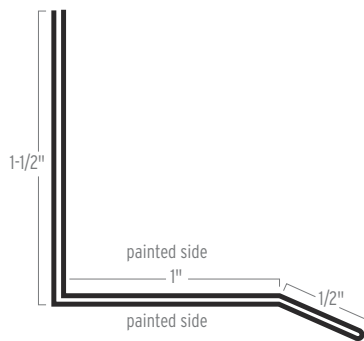


DRIP CAP 1"

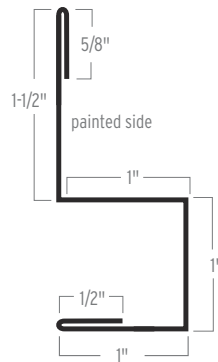

SQUARE BASE TRIM



UTILITY TRIM

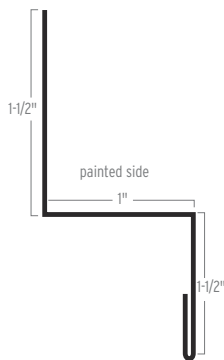


DOUBLE ANGLE



Board and Batten

Crafted For The Professional To Last A Lifetime

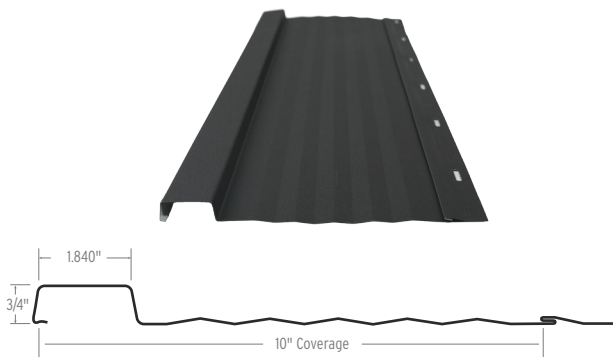

Summary

The Board and Batten panel is a concealed fastener panel that takes place of historically wooden siding, but now boasts the longevity of metal.

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 10" Coverage with .75" Rib Height




WeatherXL


NOTE: Color selection guides for this panel can be found on pages 3 and 4.

Trims


Board and Batten

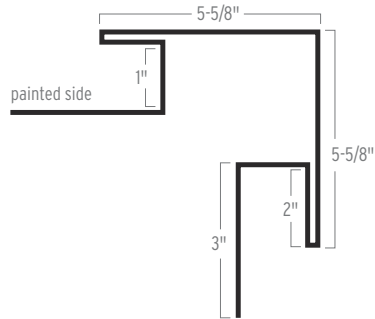


OUTSIDE CORNER

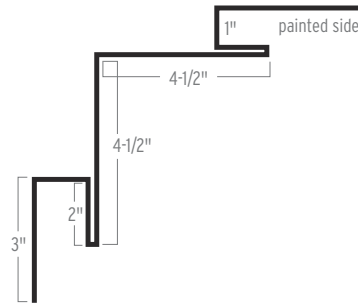


INSIDE CORNER

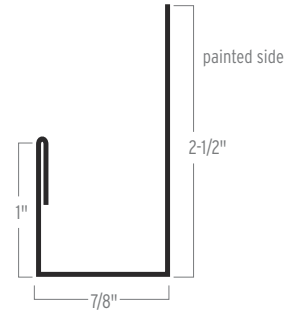

J-TRIM

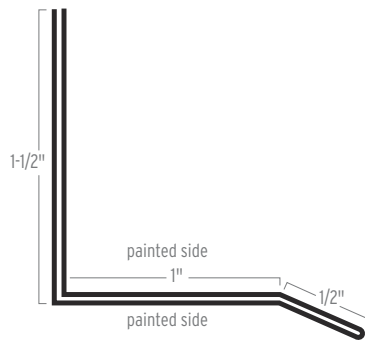


DRIP CAP 1"

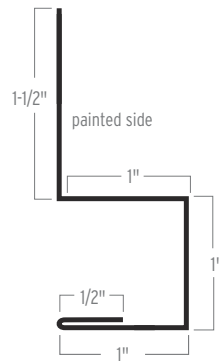

SQUARE BASE TRIM




UTILITY TRIM

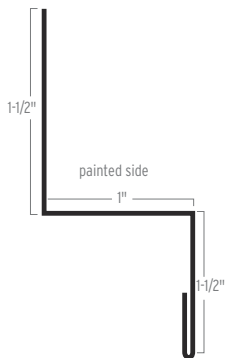

DOUBLE ANGLE

Prime Loc Siding

Crafted For The Professional To Last A Lifetime

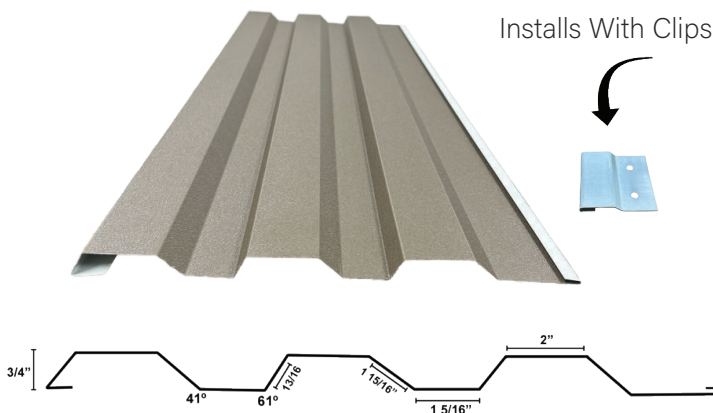

Summary

A sleek, durable siding solution. Perfect for agricultural, industrial, retail, and residential projects. Prime Loc offers long-lasting performance and visual appeal.

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL
- ✓ Kynar 500 in select colors

Sizing


- ✓ 13.5" Coverage with .75" Rib Height
- ✓ Available in 10' 2" and 12' 2" lengths




NOTE: Color selection guides for this panel can be found on pages 3 and 4.

Trims


Prime Loc Siding

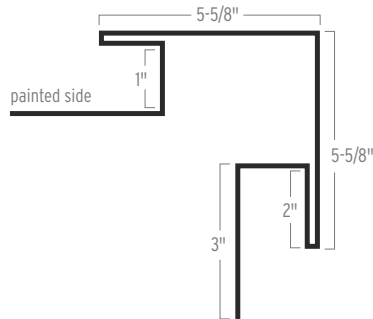


OUTSIDE CORNER

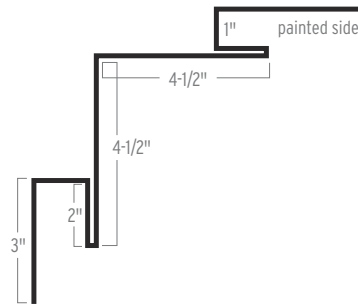


INSIDE CORNER



J-TRIM

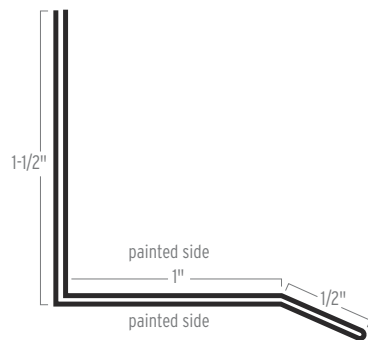


DRIP CAP 1"

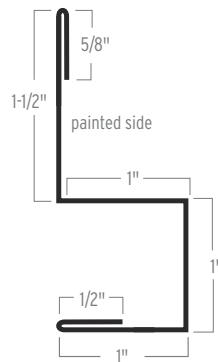

SQUARE BASE TRIM



UTILITY TRIM

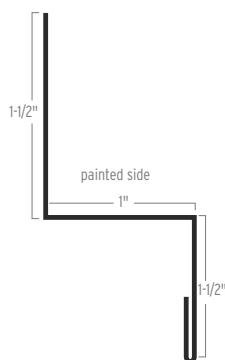


DOUBLE ANGLE



R-Panel

Crafted For The Professional To Last A Lifetime

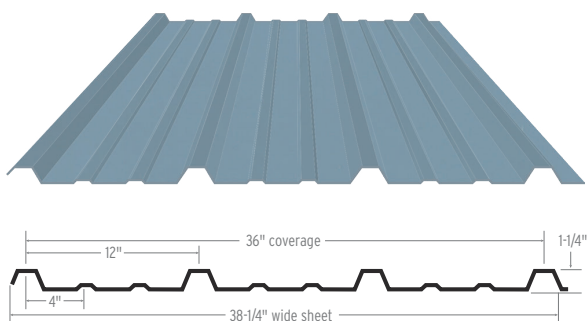

Summary

The popular and versatile R-Panel features a classic look and is used primarily for commercial, post-frame and steel frame building applications.

Panel Specifications

Thickness

- ✓ 26 Gauge Steel - .0185" Before Paint .0202" After Paint
- ✓ 80,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing

- ✓ 36" Coverage with 1.25" Rib Height
- ✓ Minimum Slope: 1/12


NOTE: Color selection guides for this panel can be found on page 28.




WeatherXL

Trims


R-Panel




RAT GUARD

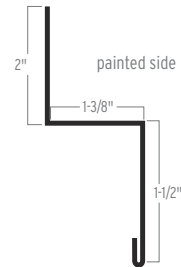


DOUBLE ANGLE

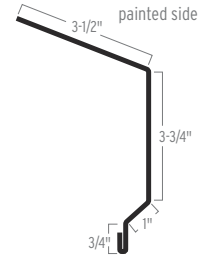


FASCIA EAVE

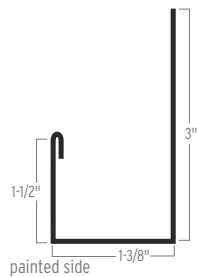


J-TRIM




OUTSIDE CORNER

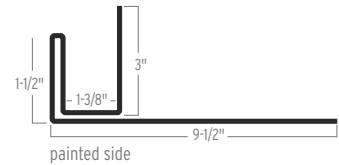


OVERHEAD DOOR TRIM

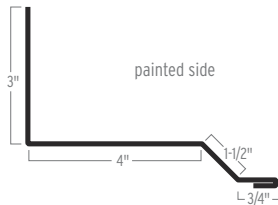

SIDEWALL

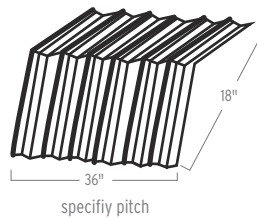


FORMED RIDGE CAP



DRIP CAP

Color Selection Guide

26 Gauge Lifetime



Brilliant White



Burnished Slate




Light Stone



Ash Gray



Galvalume



Brown



Charcoal



Black




Hunter Green

Disclaimer: Colors may appear different in various lighting conditions and on different surfaces. Samples are intended as a guide only. For the most accurate color representation, refer to our physical Color Selection Card.



5-V Panel

Crafted For The Professional To Last A Lifetime

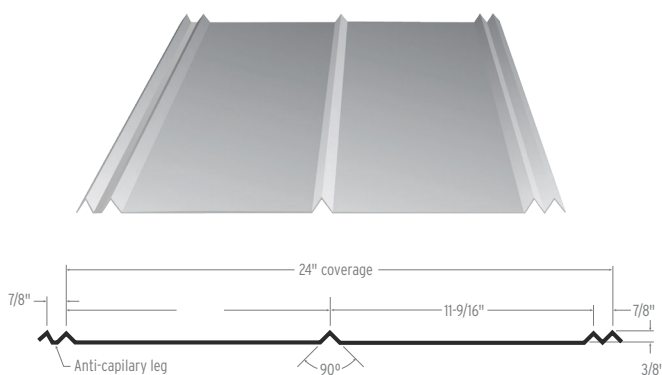

Summary

Ramco's 5-V panel is suited for interior use. The unique panel is a great accent panel that can add stylish detail to your project.



WeatherXL

Panel Specifications

Thickness

- ✓ 28 Gauge Steel - .0157" Before Paint .0176" After Paint
- ✓ Full Hard 88,000 PSI Min

Rust Protection

- ✓ AZ50 Galvalume Substrate

Paint System

- ✓ Sherwin Williams Weather XL

Sizing


- ✓ 24" Coverage with .75" Rib Height

NOTE: Color selection guides for this panel can be found on pages 3 and 4.



Pro-Fit 12" Soffit

Crafted For The Professional To Last A Lifetime

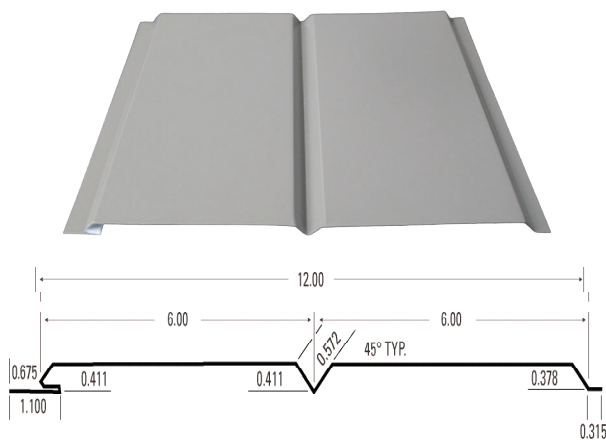

Summary

Pro-Fit soffit is made for both residential and commercial buildings. Additionally the soffit comes pre-cut which saves contractors installation time on the job site.

Panel Specifications

- ✓ Solid and Vented Steel Soffit
- ✓ 28 Gauge Steel
- ✓ Over 40+ Colors Available

Sizing

- ✓ Custom Soffit Cuts from 8" to 12'


Paint System

- ✓ Sherwin Williams Weather XL



Pro-Fit 16" Soffit

Crafted For The Professional To Last A Lifetime

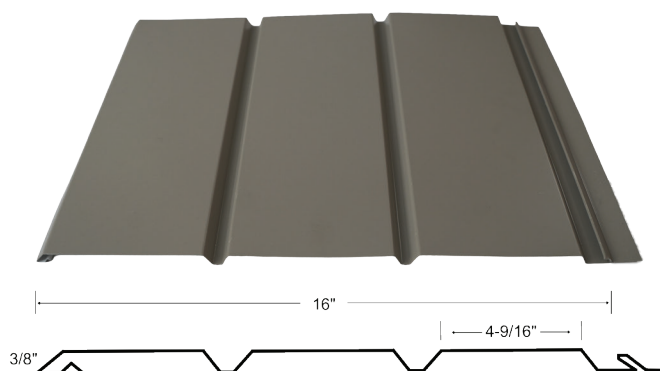

Summary

Pro-Fit soffit is made for both residential and commercial buildings. Additionally the soffit comes pre-cut which saves contractors installation time on the job site.

Panel Specifications

- ✓ Solid and Vented Steel Soffit
- ✓ 28 Gauge Steel
- ✓ Over 40+ Colors Available

Sizing

- ✓ Custom Soffit Cuts from 8" to 12'

Paint System


- ✓ Sherwin Williams Weather XL




WeatherXL

Trims


Soffit & Fascia

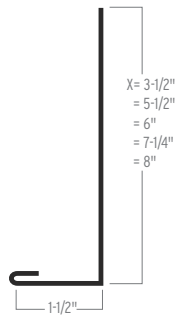


SINGLE ANGLE

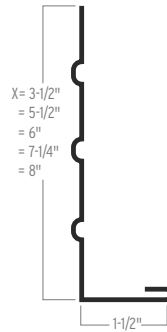


BEADED FASCIA

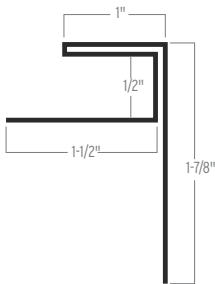


F-TRIM FOR SOFFIT

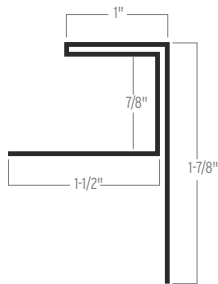


F-TRIM FOR PANEL

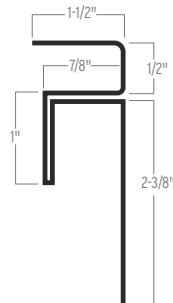


F&J FOR SOFFIT

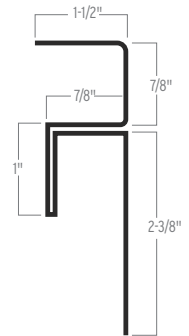


F&J FOR PANEL

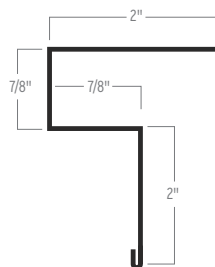

SOFFIT TRIM FOR PANEL

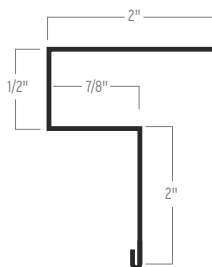

SOFFIT TRIM FOR SOFFIT

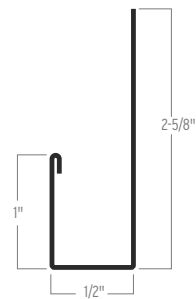

SOFFIT J-TRIM



Solid-Wall Bracket System

Crafted For The Professional To Last A Lifetime

Wet Set Option



Dry Set Option





The Solid Wall brackets help you build strong foundations and walls quickly and easily - saving you time on the jobsite.

Specifications

- ✓ Wet & Dry Set option available
- ✓ Dry Set is suited for situations where foundation has been poured and cured.
- ✓ Can be used in new buildings or remodel projects
- ✓ Wet set can be installed when concrete is still wet.

FASTENERS

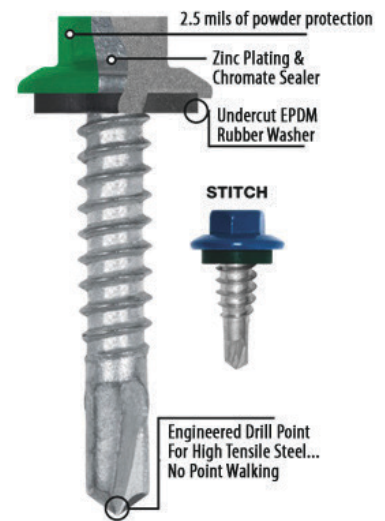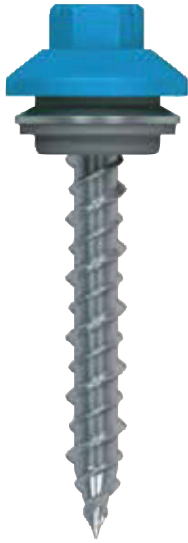

ULTIMATE SCREW

- Lifetime 40 Year Warranty Long Life Fastener.
- Designed to fasten steel roofing to wood purlins used in post-frame construction, & plywood or OSB used in residential construction.
- 5/16 cupped HWH with a molded ZAMAC 5 Zinc-Aluminum alloy provides lifetime protection against red rust on the head & washer. The ZAMAC 5 alloy provides more strength than more common ZAMAC 3 alloy. You may obtain a free copy of the written warranty upon request.
- ULTIMATE is an excellent choice for GALVALUME & other long-life metal roof panels.
- Threads transition from fine to coarse to generate superior holding strength in various wood substrates.
- Sharp point with pronounced lead thread consistently drills high-tensile 29 & 26 gauge steel with no "point walking."
- Type 17 point reduces metal shavings that can embed themselves in the rubber washer.

#10 WOODTITE

- Innovative hybrid threads penetrate metal panels, hard woods and knots allowing for quicker installation
- Self tapping type-17 point, to help remove pigtails
- Nonconductive washer
- #10 diameter, 14 threads per inch
- Carbon Steel with Oxyseal coating

STEELBINDER MAXX SCREW

- Fastener designed to attach metal roof and sidewall panels used in pre-engineered metal building applications.
- #12 Diameter 5/16 Cupped HWH self-drilling fastener easily penetrates steel up to .210 in thickness with no "point walking". 1/4 Stitch will securely fasten 2 layers of 26 GA with no strip-out.
- Cupped head & washer encapsulate EPDM rubber washer and provide a secure seal even when driven at an angle.
- Stocked in Ramco Commercial Colors only

Pipe Boots



Summary

Pipe boots are waterproof flashing for the pipes that come out of your roof.

Boot Specifications

Standard Boots

Sizes	Temp Rating
1-1/4" - 4"	238 Degrees
3" - 6"	238 Degrees
4" - 7"	238 Degrees
5" - 9"	238 Degrees
6" - 11"	238 Degrees
7" - 13"	238 Degrees
10" - 18"	238 Degrees

High Temp Boots

Sizes	Temp Rating
4" - 7"	392 Degrees
7" - 13"	392 Degrees

Split Boots

Sizes	Temp Rating
1/2" - 4"	238 Degrees
3-1/4" - 10"	238 Degrees

Windows



**BARN STYLE
HOPPER WINDOWS**
22 X 29 | RO 23-1/2 X 30-1/2



WHITE VINYL SLIDER WINDOW
36 X 24 | RO 36-1/2 X 23-1/2
36 X 36 | RO 36-1/2 X 35-1/2*
48 X 36 | RO 48-1/2 X 35-1/2*



WHITE VINYL SINGLE HUNG
30 X 36 | RO 30-1/2 X 36-1/2*
36 X 48 | RO 36-1/2 X 48-1/2*

*WITH OR WITHOUT GRIDS

Cupolas



Window Cupola

24x24" cupola with windows
36x36" cupola with windows
48x48" cupola with windows



Louver Cupola

24x24" cupola with louvers
36x36" cupola with louvers
48x48" cupola with louvers

Summary:

Prepainted **28** gauge construction.
Available in Ramco colors.
All metal edges are hemmed.
No need to worry about red-rust.
Bird screen included for mounting in curb.
Roof and sides interlock for weather-tite connection.
24", 36", and 48" shipped unassembled.

Stock Weathervanes:

24"

Country Doctor
Eagle
Horse
Rooster

30"

Buck
Country Doctor
Cow
Eagle
Horse
Rooster



STEEL ENTRY DOORS




HEAVY DUTY T8 THERMALLY BROKEN DOOR

3068 RIGHT OR LEFT HAND SWING

OPTIONAL 9-LIGHT 22 X 36

ALUMINUM FRAME WINDOW

- Excellent energy savings
- Attractive seamless appearance
- Low maintenance (no painting)
- Durable yet economical
- Full thermal break of jambs, header / threshold and panel
- 16 gauge x 3-1/2" pre-painted jambs
- 24 gauge pre-painted white door panel
- Full perimeter weatherstripping
- Universal 4-way swing
- 3'0" x 6'-8" RO 39-1/4" x 81-1/4"
- 3 fixed pin hinges
- Nylon lockset insert
- Adjustable strike plate
- Prepped for closure


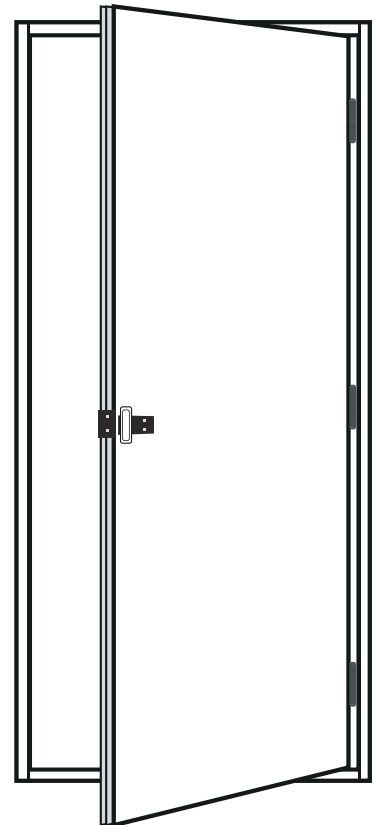


STANDARD AS2 STEEL ENTRY DOOR


RIGHT OR LEFT HAND SWING

OPTIONAL 1-LIGHT 22 X 36 WINDOW

- Full 1-3/4" thick panel
- Wrap-around design gives commercial look to panel
- Pre-hung 4-way universal swing
- Frame has common header/threshold
- 2-3/4" backset standard
- 26 gauge pre-painted white door panel
- Fixed-pin hinges
- Nylon lockset insert
- 16 gauge x 3-1/2" pre-painted jambs
- 3'0" x 6'-8" RO 38-1/4" x 81-1/4"

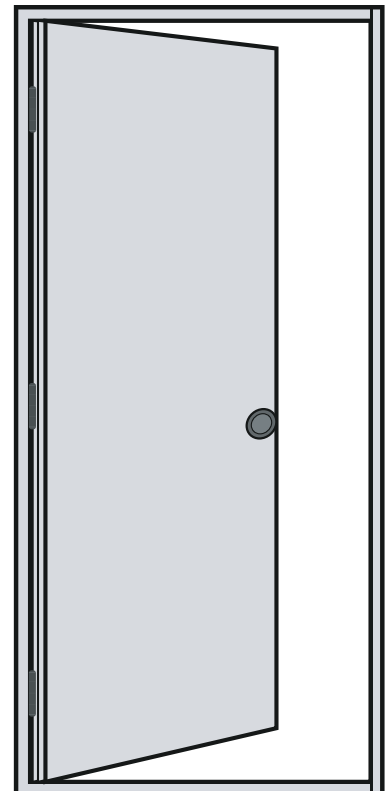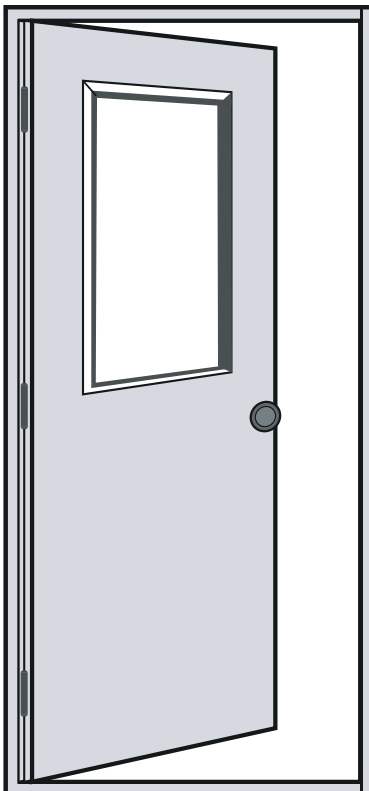

DOOR SWING GUIDE

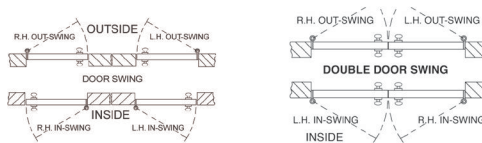

Sliding Door Systems



SIDE RAIL



DOUBLE COUPLE H RAIL



STEEL GIRT



BOTTOM RAIL



BIGG FRAME
BOTTOM RAIL



BIGG FRAME SIDE RAIL



BIGG FRAME
DOUBLE COUPLE H RAIL



KEYHOLE TRACK



STAY GUIDE



CANNONBALL
TROLLIES



CANNONBALL
SPLICE COLLAR



DOUBLE TRACK
BRACKET



CENTER SNUGGER



JAMB LATCH



CANNONBALL
KEEPER STOPPER



TRACK END CAP



OFFSET ADJUSTABLE
STAY ROLLER



LONG FACE MOUNT
TRACK BRACKET



ADJUSTABLE
DOOR STOP



SHORT FACE MOUNT
TRACK BRACKET



JUMBO DOOR HANDLE

Insulations/Vapor Barriers

WALL INSULATION



POST FRAME INSULATION


- Available in 93" x 55'
- Unfaced R19 batt
- Strong and resilient insulation
- Easily to cut and install



VINYL BACKED INSULATION

- 4' x 50' and 5' x 50' rolls
- 6" R19 with vinyl back
- Energy saver
- Sound control batts
- Easy to install

VAPOR BARRIERS

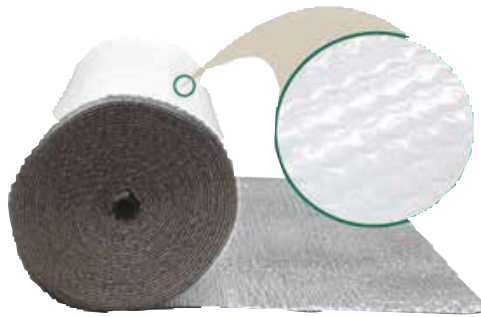

REFLECTIVE DOUBLE BUBBLE FOIL / WHITE INSULATION

- 4' x 125' and 6' x 125' roll sizes
- Easy to handle and install
- Class A / Class 1 Fire Rating
- Inhibits dew point condensation
- Non-toxic / non-carcinogenic



THERMOBLOCK FOAM INSULATION

- Lightweight 4' x 8' sheets
- Non-toxic and requires no special equipment or clothing
- Reflects radiant energy back to its source, helping distribute heat evenly, resulting in greater energy savings
- Virtually eliminates moisture and air infiltration.

CEILING INSULATION



FIBERGLASS INSULATION BATT

- R-30 unfaced 24" x 48"
- Pre-cut for easy install
- Helps maintain temperature and control noise



FOAM AIR BAFFLE

- Polystyrene construction is light-weight and moisture resistant
- Designed to channel air into the attic for circulation
- Install between rafters to provide an unobstructed air channel through insulation to keep air flowing from soffits to ridge vents
- Can be cut to fit most joist spaces

Ventilation Systems



Ivent ECO

- Preinstalled 1/2" butyl tape for waterproof seal
- Compatible with existing 4" systems



Ivent Wallvent ECO

- Lower opening with grid drains condensation
- 4-1/4" vent inlet pipe connects to 4" duct



Ivent Attic Vent

- Preinstalled 1/2" butyl tape for waterproof seal
- Engineered for roofs with a 3/12 minimum slope



Ivent Cable Roof Penetration

- Preinstalled 1/2" butyl tape for waterproof seal
- EPDM rubber seals cables up to 1" diameter



Ivent Roto Attic Vent

- Preinstalled 1/2" butyl tape for waterproof seal
- Compatible with existing 4" systems

Disclaimer: Mounting method shown may differ depending on roofing system.


Accessories



OUTSIDE FOAM SEALER



UNI-SEAL



INSIDE FOAM SEALER



ROLLED VENT



BUTYL TAPE 3/8" X 45' ROLL



BUTYL TAPE 1" X 50' ROLL



WEATHER TIGHT
LP VENT




SNOW DEFENDER 4500



SOLAR SEAL
COLOR MATCHED CAULK

TRIM PLACEMENT CHART

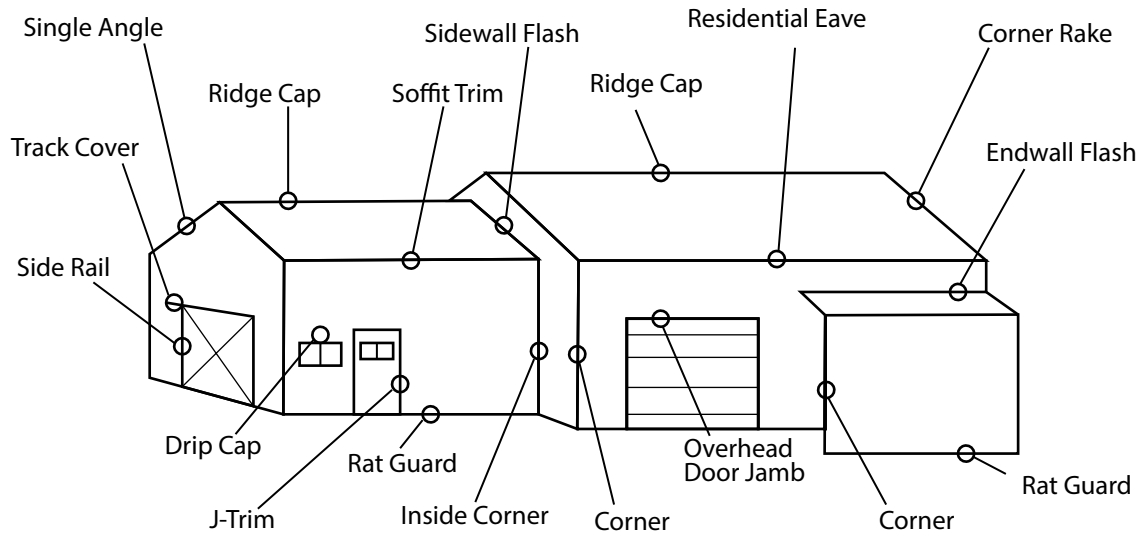



Delivery Within 48 Hours or Less

On-Site Damage Free, Fast Delivery!

Ramco is founded and owned by a former contractor who knows what kind of problems a missed delivery will cause on the job site.

That's why we make it our personal mission to make sure your steel order is delivered on time.

- ✓ 48 Hour or less delivery
- ✓ Well Packaged Materials
- ✓ Damage Free
- ✓ Properly Organized When Delivered

Disclaimer: Ramco reserves the right to change "Delivery within 48 hours or less" without prior notice.

UL LISTED

RAMCO METAL PANELS ARE UL CERTIFIED

• • • FULL UL LISTING AND COMPLIANCE • • •

EXPERIENCE THE BENEFITS OF THIRD PARTY CERTIFICATION
FROM THE BEST KNOWN INDEPENDENT PRODUCT CERTIFICATION ORGANIZATION
THAT PERFORMS UNANNOUNCED ON-SITE INSPECTIONS



ALL METAL PANELS MANUFACTURED BY RAMCO ARE UL CERTIFIED

U.L. (Underwriters Laboratories) is an independent, not-for-profit product safety testing and certification organization, founded in 1894. Over the last century, Underwriters Laboratories has become the world's best known independent product safety certification organization. Millions of products and their components are tested to UL's rigorous safety standards.

Underwriters Laboratories publishes a list stating the product has been tested to and complies with the applicable Standard. Underwriters Laboratories also maintains quarterly inspections to assure production of the listed products are in accordance with the listing. Having UL Listing guarantees that the product fully complies with each and every one of UL's requirements in the applicable Standard, and the manufacturer's product can then bear the UL Mark.

The UL listing is called a "Third Party Certification" providing an unbiased safety assurance to interested parties including the manufacturer, the specifier, and the consumer. UL's field reps worldwide conduct periodic, unannounced on site inspections of UL-certified products in the manufacturer's factory. The product is verified as being fully compliant with the set of rules governing the product.



UL CERTIFIED GUARANTEES CONFIDENCE IN QUALITY AND DURABILITY
Visit www.ul.com certification directory to see our listing R38846



Woodburn, IN
22822 Roemer Drive
Woodburn, IN 46797
Phone: (260) 632-0598
Fax: (260) 632-0606

☐ Smooth

☐ Crinkled

☐ ORDER

☐ ESTIMATE

- ☐ Ram-Panel
- ☐ RX-4
- ☐ Board & Batten
- ☐ 24ga. 17" Super Loc
- ☐ 26ga. 16" Super Loc
- ☐ Corrugated: 374" 1 1/4"
- ☐ R Panel
- ☐ Liner Panel
- ☐ Metal Lap
- ☐ Modern Plank

Address: _____

TRIM & ACCESSORIES																	
QTY:		LENGTH:		COLOR:		DESCRIPTION:			QTY:		LENGTH:		COLOR:		DESCRIPTION:		
						RAT GUARD									WEATHER TITE		
						RIDGE CAP									UNI-VENT		
						ENDWALL									UNI-SEAL		
						DENVER ENDWALL									1" SCREWS		
						SIDEWALL									1.5" SCREWS		
10	12	14	16	18	20	OUTSIDE CORNER									2" SCREWS		
10	12	14	16	18	20	RESIDENTIAL RAKE			ADDITIONAL:								
						RESIDENTIAL EAVE											
						6" BEADED FASCIA											
						ROLLFORMED RAIL											
3.5	5.5	6	7.25	SINGLE ANGLE													
10	12	14	16	OVERHEAD DOOR JAMB													
10	12	14	16	18	20	MINI CORNER											
						DOUBLE ANGLE											
						DRIP CAP											
						F&J FOR SOFFIT											
						F&J FOR PANEL											
						J TRIM											
						INSIDE CORNER											
						SOFFIT TRIM											
						SOFFIT TRIM FOR PANEL											
						DJ8 TRIM											
						DJ8 WIDE TRIM											
						TRANSITION TRIM											
						WIDE VALLEY TRIM											
						VALLEY TRIM											
						LOWER GAMBREL											
						UPPER GAMBREL											
						TRACK COVER											
						41"WIDE FLATSTOCK											

NOTES

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



ROCHESTER

4572 N Old US Highway 31
Rochester, Indiana 46975
877-889-7802

WOODBURN

22822 Roemer Drive
Woodburn, Indiana 46797
844-435-0598

MIDDLEBURY

53117 IN-13
Middlebury, IN 46540
800-575-1713

www.ramcosupply.com